This document covers how to arm and disarm your alarm panel through the alarm.com app.

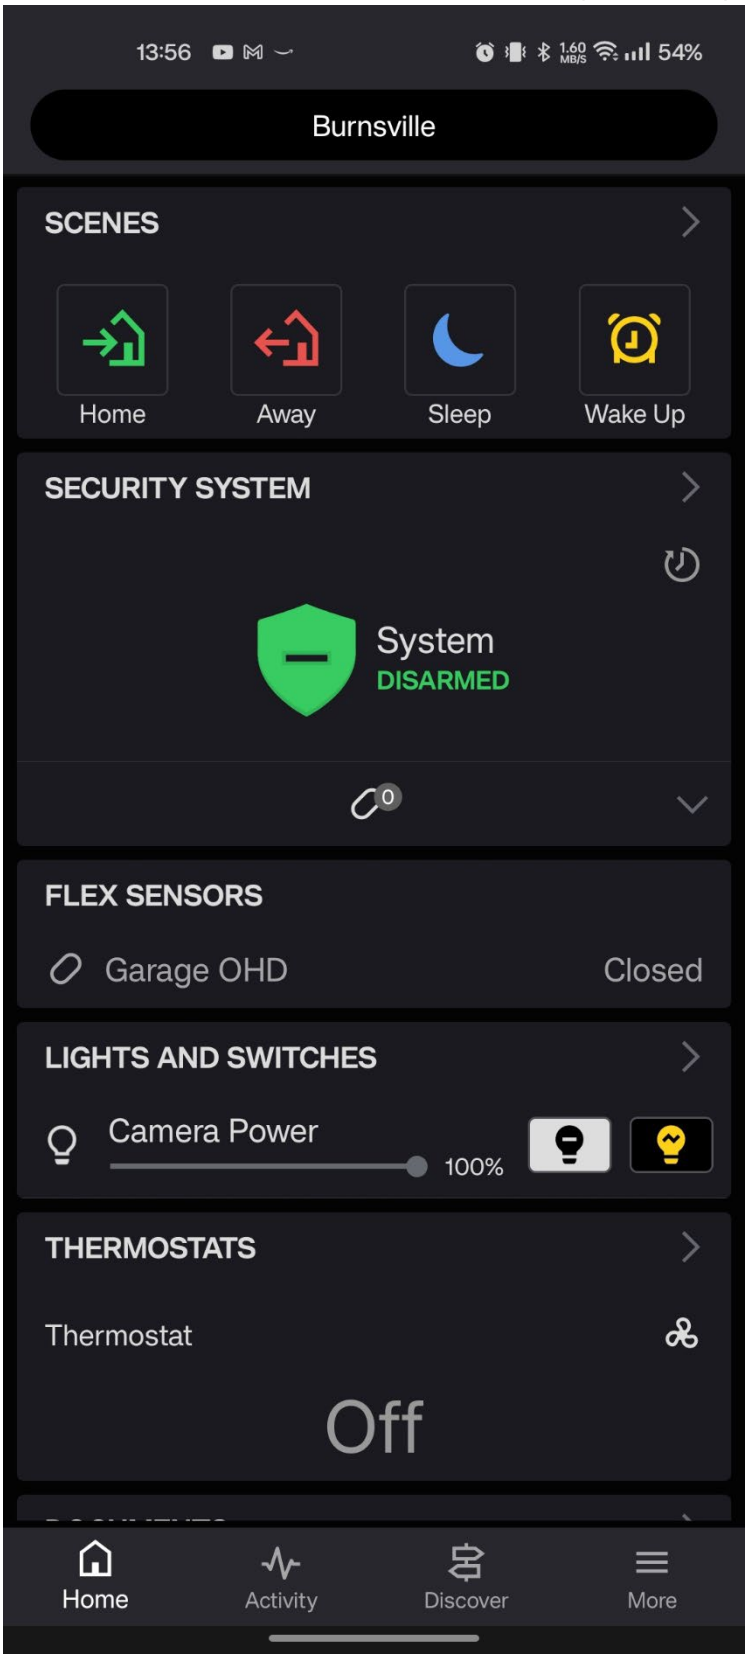

To arm your alarm panel:

1. Press the green shield.
2. A sub-screen will pop up with five options.
    a. Silent Arming (used mostly at night)
    b. No Entry Delay (DO NOT USE)
    c. Bypass Specific Sensors (Used when there is an issue with the system)
    d. Arm (Stay) (The motion detectors are disabled, allowing motion within the building)
    e. Arm (Away) (Motion detectors will be active)

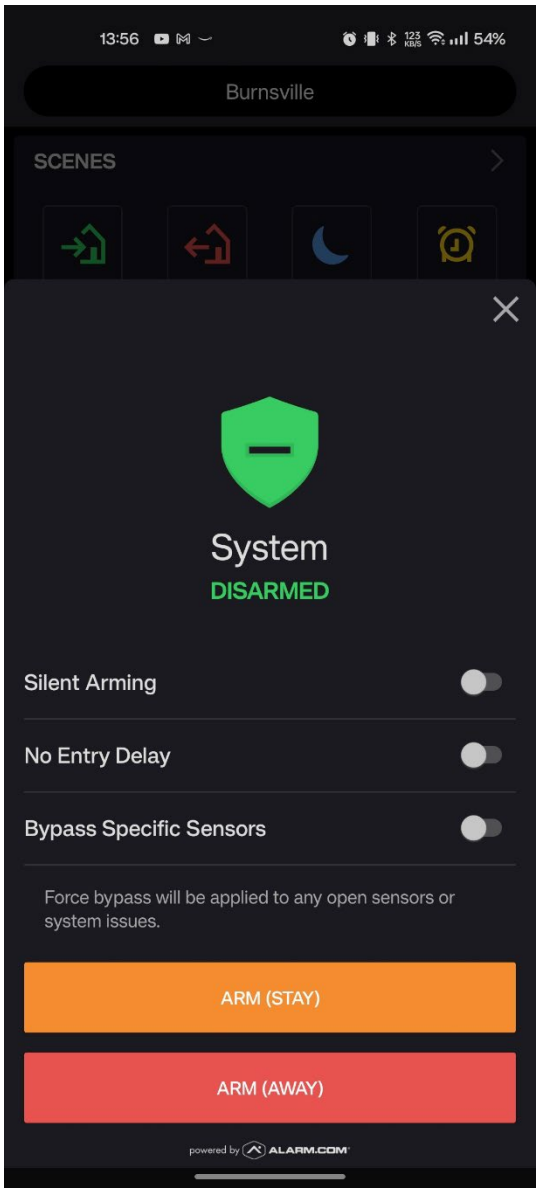

3. You will be using 2 main features, Arm (stay) and Arm (away)
4. Click on either Arm (stay) or Arm (Away)
5. The green shield will be replaced with either an orange or red shield, depending on whether arming stay or away.

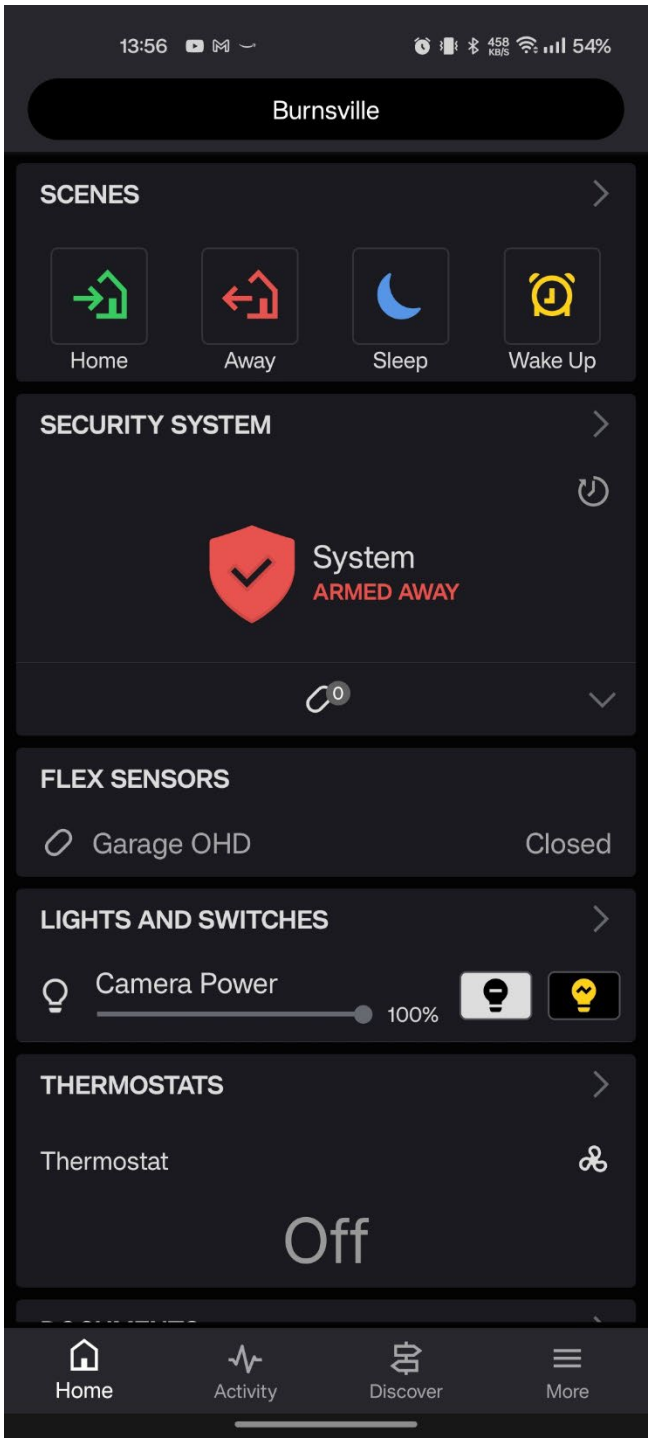

6. To disarm:
    a. Simply press on the orange or red shield to bring up the disarm button.
    b. Press on Disarm.
    c. The system should now be disarmed.

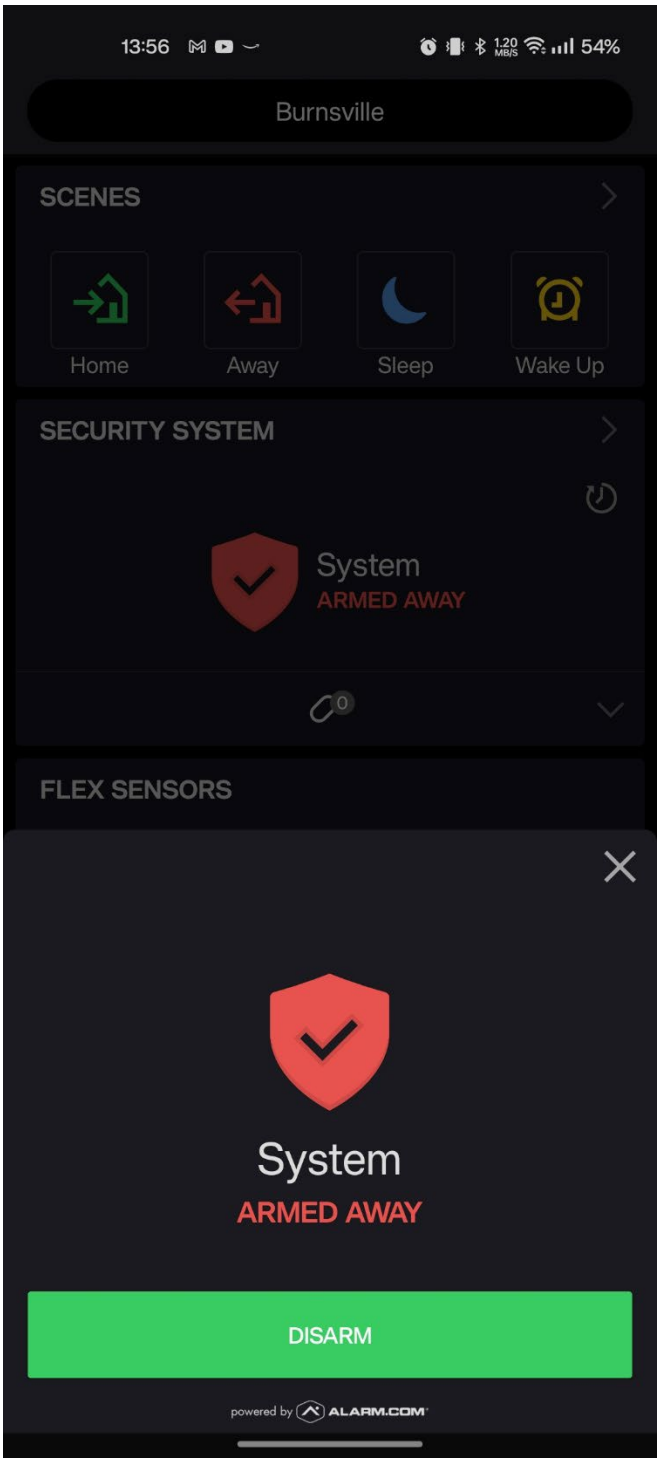

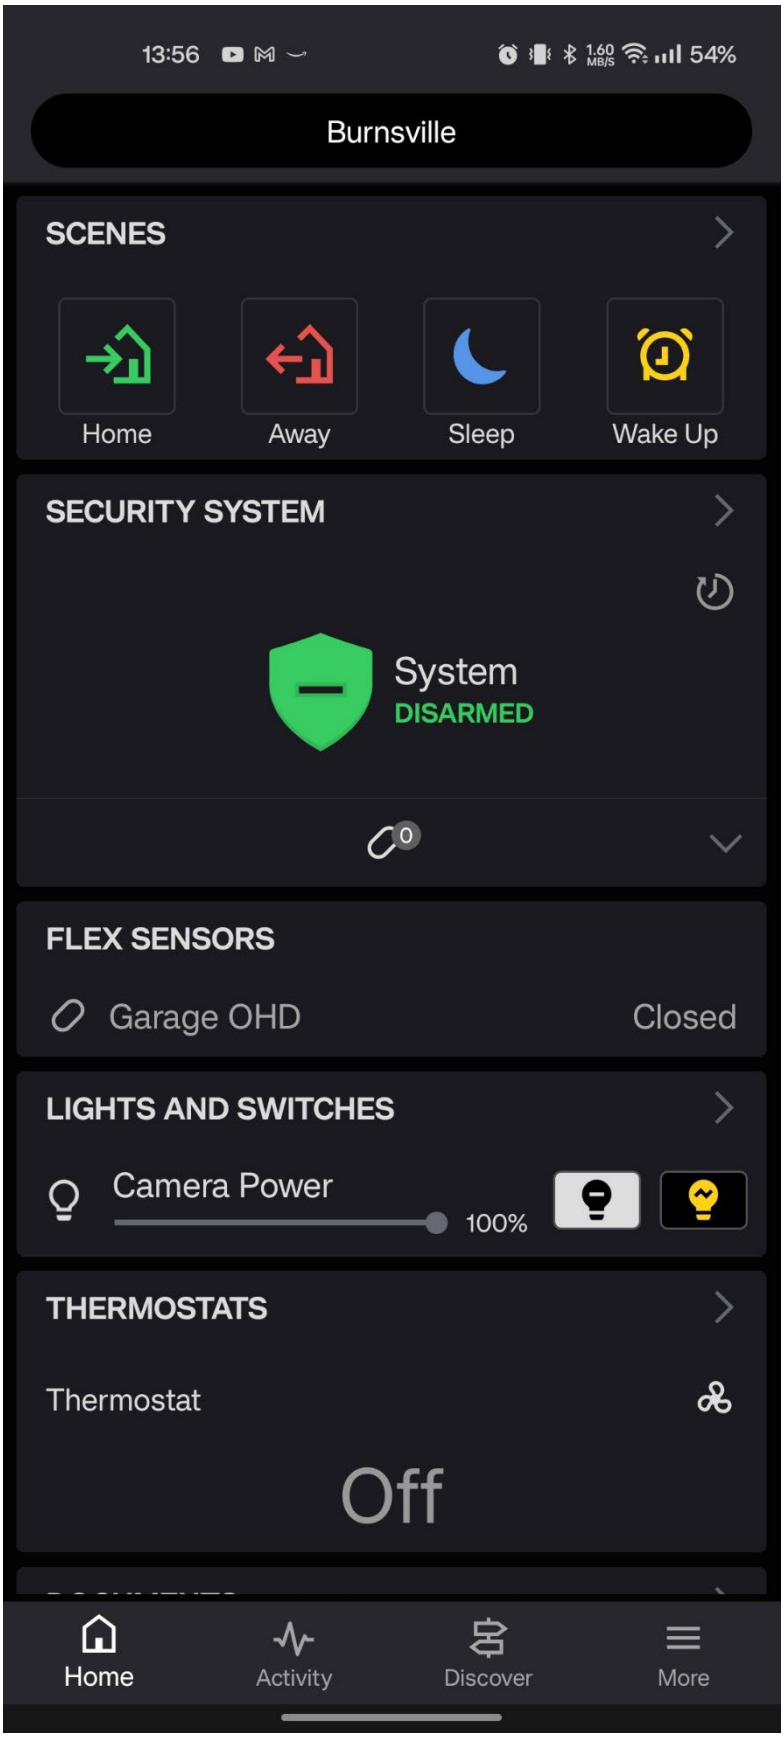
13:56
54%
Burnsville
SCENES
Home
Away
Sleep
Wake Up
SECURITY SYSTEM
System
DISARMED
0
FLEX SENSORS
Garage OHD
Closed
LIGHTS AND SWITCHES
Camera Power
100%
THERMOSTATS
Thermostat
Off
Home
Activity
Discover
More